



Residential



Voice & 4G LTE



Multiple users



All carriers

Fusion5s™

Voice and 4G LTE Data Home Cell Signal Solution

SureCall Fusion5s All-Carrier Voice and Data Cellular Signal Booster

Overview

SureCall Fusion5s is an all-carrier cell phone signal booster designed for home and office use. This five-band booster produces enhanced voice, text and 4G LTE data signal for all major U.S. carriers, including Verizon, AT&T, Sprint and T-Mobile. The Fusion5s is fully configurable for all indoor environments, ensuring enhanced call clarity for up to 10 simultaneous users and includes the industry's best 3-year warranty.

Features and Benefits

- Boosts signal for voice, text and 4G LTE data for up to 6,000 sq. ft.
- Reduces dropped and missed calls and improves performance for 4G LTE data speeds for all cell phones and all carriers
- Clearer calls due to lowest noise figure in the industry
- Durable metal housing provides long-term reliability
- Built-in safeguard completely eliminates interference to cell tower
- Approved by all major US carriers
- Extends battery life

Booster Kits Include:

All Fusion5s kits include low dB loss SC-400 coax cable

Fusion5 Standard kit model **SC-PolysH/O-72-OD-Kit** includes: outside omni¹ antenna, inside dome³ antenna, 30 and 75 ft. cable.

Additional kits:

SC-PolysH/O-72-YD-Kit: Outside Yagi² antenna with inside dome³ antenna, 30 and 75 ft. cable

SC-PolysH/O-72-OP-Kit: Inside omni¹ antenna with inside panel⁴ antenna, 30 and 75 ft. cable

SC-PolysH/O-72-YP-Kit: Outside Yagi² antenna with inside panel⁴ antenna, 30 and 75 ft. cable

1. Omni antennas are the ideal solution for sending/receiving signal from all directions.
2. Yagi antennas are directional and should typically be aimed in the direction of best signal.
3. Dome antennas send/receive signal in all directions indoors.
4. Panel antennas provide directional indoor coverage.



SureCall Fusion5s Yagi/Panel kit

Key Features:

- Auto Gain Control (AGC) for simplified antenna placement
- Independently reconfigurable for each band
- Supports all voice and 4G LTE data standards
- Quality metal construction, durable and resilient
- Stealth technology incorporated – uplink becomes dormant when not in use, providing green, energy-saving operation
- Four Embedded CPU for smarter technology
- Meets or exceeds FCC technical standards for cellular boosters
- Ten RSSI detectors for all inputs and outputs
- Lowest Out of Band Emissions (OOBE) to date
- Patent No. US 8,867,572 B1

Fusion5s | 02-25-16 v3



» See page 2 for specifications and installation diagram



Fusion5sTM

Voice and 4G LTE Data Home Cell Signal Solution

Specification

Model No.

Uplink Frequency Range (MHz):

Downlink Frequency Range (MHz):

Supported Standards:

Input/Output Impedance:

Maximum Gain:

Noise Figure:

AC Power Transmitter:

Maximum Output Power:

Cable:

RF Connectors:

Power Consumption:

Dimensions:

Weight:

FCC (USA)

Fusion5s

698–716 / 776–787 / 824–849 / 1850–1915 / 1710–1755 (G Block Included)

728–746 / 746–757 / 869–894 / 1930–1995 / 2110–2155 (G Block Included)

CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards

50 ohm

72 dB

8 dB

Input AC 110 V, 60 Hz / Output DC 12 V

1 Watt EIRP

SC-400

N Connector (both ends)

<25W

9.25 x 6.38 x 1.38 inches


3 lbs

RSNEZBOOST5 / RSNFUSION5S-X20

Specifications are subject to change. Specifications contained within apply only to products meeting the latest FCC Certification Guidelines.

Installation Example

Fusion5s Yagi/Panel kit

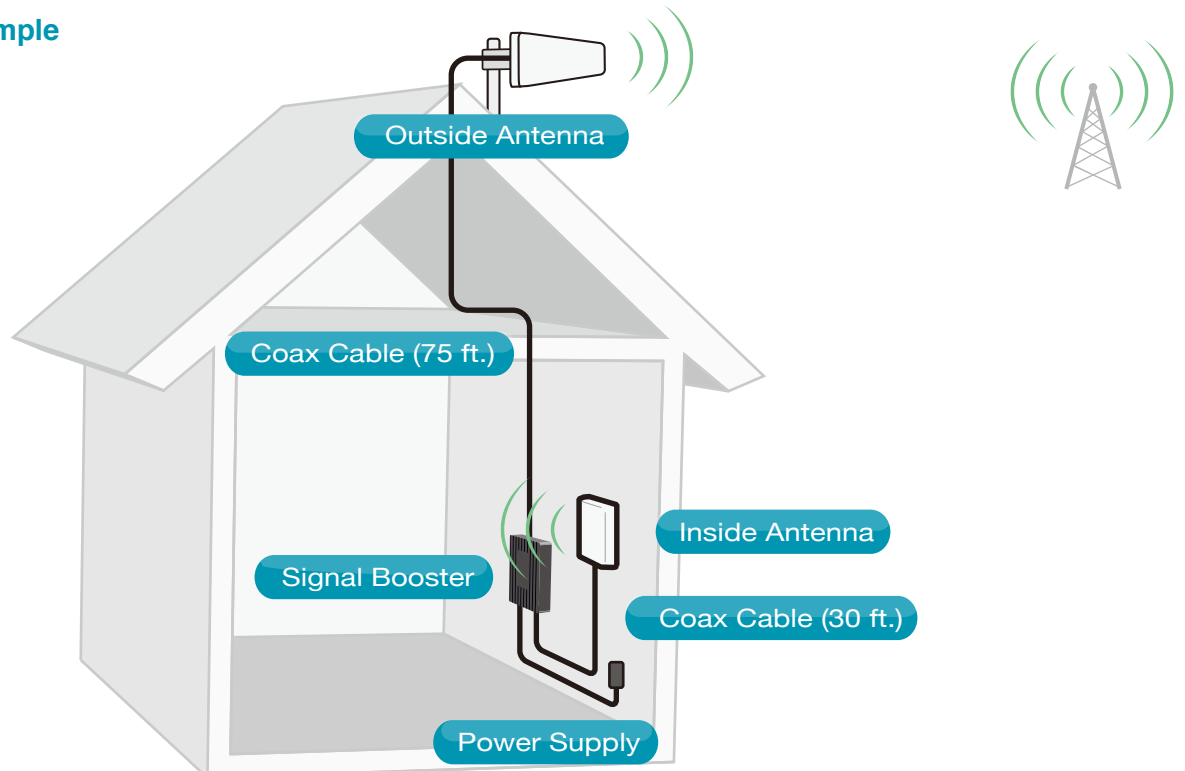

This is a CONSUMER device.

BEFORE USE, you MUST REGISTER THIS DEVICE with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider. You MUST operate this device with approved antennas and cables as specified by the manufacturer. Antennas MUST be installed at least 20 cm (8 inches) from any person. You MUST cease operating this device immediately if requested by the FCC or a licensed wireless service provider. WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device. This device may be operated ONLY in a fixed location for in-building use.

© 2016 SureCall